



1400

Multi-Channel Monitor

INSTRUCTIONS

Installation and Operation of the AMC-1400 Multi-Channel Monitor with voltage inputs

IMPORTANT:

Please read these installation and operating instructions completely and carefully before starting.



TABLE OF CONTENTS


| SECTION TITLE | PAGE |
|---|-----------|
| 1 SAFETY SYMBOLS | 1 |
| 2 GENERAL INFORMATION | 2 |
| 2.1 WARRANTY | 2 |
| 2.2 LIABILITY | 2 |
| 2.3 MODIFICATIONS AND SUBSTITUTIONS | 2 |
| 2.4 PRODUCT RETURN | 2 |
| 2.5 CONTACT INFORMATION | 3 |
| 3 PRODUCT INFORMATION | 4 |
| 3.1 RELAY CONTACT INFORMATION | 4 |
| 4 GENERAL DESCRIPTION | 5 |
| 5 INSTALLATION | 8 |
| 5.1 LOCATION AND MOUNTING | 8 |
| 5.2 CABLE SELECTION | 8 |
| 5.3 WIRING OF THE MONITOR | 8 |
| 6 OPERATION AND FEATURES | 11 |
| 6.1 POWER-ON SELF TEST (POST) | 11 |
| 6.2 DISPLAY | 12 |
| 6.2.1 DISPLAY ALARM MODE: | 12 |
| 6.2.2 SIMULTANEOUS DISPLAY MODE: | 13 |
| 6.2.3 DISPLAY NEW ALARMS ONLY MODE: | 14 |
| 6.2.4 DISPLAY ALL DATA MODE: | 14 |
| 6.3 FEATURES | 15 |
| 6.4 OPERATOR INTERFACE | 18 |
| 6.4.1 OPERATOR KEYPAD | 18 |
| 6.4.2 PROGRAMMING KEYPAD | 19 |
| 6.4.3 DIP SWITCH ASSIGNMENTS | 20 |
| 6.5 AMC-1400 MENU | 21 |
| 7 PREVENTIVE MAINTENANCE | 22 |
| 7.1 GENERAL | 22 |
| 7.2 VERIFICATION OF MONITOR | 22 |
| 7.3 SENSOR MODULE MAINTENANCE | 22 |
| 7.4 CALIBRATION | 22 |



NOTE

This page intentionally left blank.


1 SAFETY SYMBOLS



CAUTION, RISK OF DANGER. REFER TO INSTRUCTION MANUAL BEFORE OPERATIONG




CAUTION, RISK OF ELECTRIC SHOCK.



SIGNIFIES THE SYSTEM'S GROUND TERMINAL.
DC refers to direct current voltages.
VAC refers to alternating current voltages.

WARNINGS



Shock Hazard - Disconnect or turn off power before servicing this instrument



WARNING – UNAUTHORIZED SUBSTITUTION OF COMPONENTS MAY IMPAIR CERTIFICATIONS AND EQUIPEMENT RATINGS



WARNING – USE OF THIS EQUIPEMENT IN ANY MANNER OTHER THAN SPECIFIED BY MANUFACTURER MAY IMPAIR OVERALL SAFETY.

Safety guidelines:

- Use a properly rated CERTIFIED AC power cable installed as per local or national codes.
- For DC powered units, DC power must be from a SELV rated source.
- A certified AC power disconnect or circuit breaker should be mounted near the controller and installed following applicable local and national codes.
- If a switch is used instead of a circuit breaker, a properly rated CERTIFIED fuse or current limiter is required to be installed as per local or national codes. Markings for positions of the switch or breaker should state (I) for on and (O) for off.
- Equipment not used as prescribed within this manual may impair overall safety.



2 GENERAL INFORMATION

2.1 WARRANTY

The AMC-1400 monitor is warranted against defects in material and workmanship for a period of two years from date of delivery. Maintenance items are not warranted. During the warranty period, *The Armstrong Monitoring Corporation* will repair or replace components that prove to be defective in the opinion of AMC. Any equipment deemed to be defective by the user should be returned to *The Armstrong Monitoring Corporation* for evaluation (see product return below). Site visits by Armstrong personnel, to evaluate/repair equipment, are not covered by this warranty. AMC is not liable for auxiliary interfaced equipment, nor consequential damage. This warranty shall not apply to any product which has been modified in any way, which has been repaired by any other party other than a qualified technician or authorized AMC representative, or when such failure is due to misuse or conditions of use.

2.2 LIABILITY

All AMC products must be installed and maintained according to instructions. Only qualified technicians should install and maintain the equipment.

AMC shall have no liability arising from auxiliary interfaced equipment, for consequential damage, or the installation and operation of this equipment. AMC shall have no liability for labour or freight costs, or any other costs or charges in excess of the amount of the invoice for the products.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND SPECIFICALLY THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE THEREOF.

WARNING

CHECK TO ASSURE THE WORKING AREA IS FREE FROM HAZARDS DURING INSTALLATION OR WHEN PERFORMING MAINTENANCE, AND USE PROPER PRECAUTIONS.

2.3 MODIFICATIONS AND SUBSTITUTIONS

Due to an ongoing development program, AMC reserves the right to substitute components and change specifications at any time without incurring any obligations.

2.4 PRODUCT RETURN

All products returned for warranty or service should be shipped by prepaid freight. Please obtain a Return Material Authorization (RMA) number from AMC prior to shipping and ensure this RMA number is clearly visible on the outside of the shipping container. Material shipped without RMA will be rejected and returned. All products returned to the client will be shipped by freight collect.



2.5 CONTACT INFORMATION

For information please call 1-800-465-5777 or through contacts at www.armstrongmonitoring.com or through email directly at support@armstrongmonitoring.com.



3 PRODUCT INFORMATION

| | |
|-----------------------------------|--|
| Monitor Serial Number | _____ |
| Power Supply Requirements | <u>120VAC, 60Hz 100W</u> |
| Power Supply Output | <u>24VDC 4.2A</u> |
| Operating Temperature Range | <u>-20°C to 40°C</u> |
| Relative Humidity | <u>20 to 80 %RH non condensing</u> |

3.1 RELAY CONTACT INFORMATION

| | | | |
|------------------------|------------------------------|---------|-----------|
| 10A DPDT Relay Ratings | Maximum Rated current | A | 10 |
| | Maximum Rated voltage | VDC/VAC | 30/250 |
| | Relay contact rating | | Resistive |
| | Breaking capacity DC: 30 VDC | A | 10 |

| | | | |
|-----------------------|------------------------------|---------|-----------|
| 6A SPDT Relay Ratings | Maximum Rated current | A | 6 |
| | Maximum Rated voltage | VDC/VAC | 24/250 |
| | Relay contact rating | | Resistive |
| | Breaking capacity DC: 24 VDC | A | 6 |



4 GENERAL DESCRIPTION

The AMC-1400 Multi-Channel monitor with voltage inputs is a micro-controller based design, providing economical advanced control, display, and annunciation capabilities for multiple Multidrop Sensor Modules. Each system features continuous display of current alarm information for four voltage inputs. This AMC-1400 version only supports voltage inputs and will not work with 4-20 mA inputs. These inputs can connect to multiple Multidrop Sensor Modules configured to voltage mode and are set up into zones.

For Multidrop zones, two alarm thresholds are supported and up to four output relays can be configured for each zone. The AMC-1400 with Voltage inputs supports AMC-1228, AMC-1228s, AMC-1222 and AMC-1225 Multidrop Sensor Modules. The AMC-1225 and AMC-1228 only work in voltage mode but the AMC-1228s and AMC-1222 must be configured to voltage mode.

Each of the 4 inputs are individually configurable to alarm on increasing levels or decreasing levels, in addition to fail detection capabilities. Output relays are provided and easily configured to a variety of operating modes, including individual outputs for each alarm threshold and failure status for each Sensor Module.

Inputs are continuously scanned and converted to a digital form using an analog multiplexer and analog-to-digital converter circuit. Each input channel level is regularly compared against preset alarm and fail thresholds. Programmable alarm activation delays are provided. All Zone configuration data, including alarm thresholds and delay settings, are stored within non-volatile memory.

Additional features include provision for an external audible alarm, an overall system fail relay and individual alarm status led(s).

Output relays are provided, to a maximum configuration of four relays per channel. The total maximum number of relays is either 16 SPDT 6A or eight DPDT 10A relays with the enclosure provided. These relays may be programmed to indicate individual alarm outputs for each threshold as well as failure, or may be programmed to provide combined alarm outputs or combined modes for installations where cost reduction through a reduced relay count is required. A programmable minimum run timer and activation delay is available for each relay.

To provide maximum flexibility and economy, voltage inputs and output relay connections are made to the Input/Output terminals providing for a maximum of four inputs.

Indication of zone and alarm status is provided using a vacuum-fluorescent (VFD) display. Review and modification of system configuration is performed using this display in conjunction with **Programming Keypad Pushbuttons** located inside the system enclosure or optional external keypad. **Operator Keypad Pushbuttons** are also provided for accessing operational functions. In addition to the VFD there are four alarm / fail status LEDs for each channel. These LEDs indicate the status of three alarms and fail.

An internal power supply provides power for the control electronics, gas sensors and alarm relay coils.

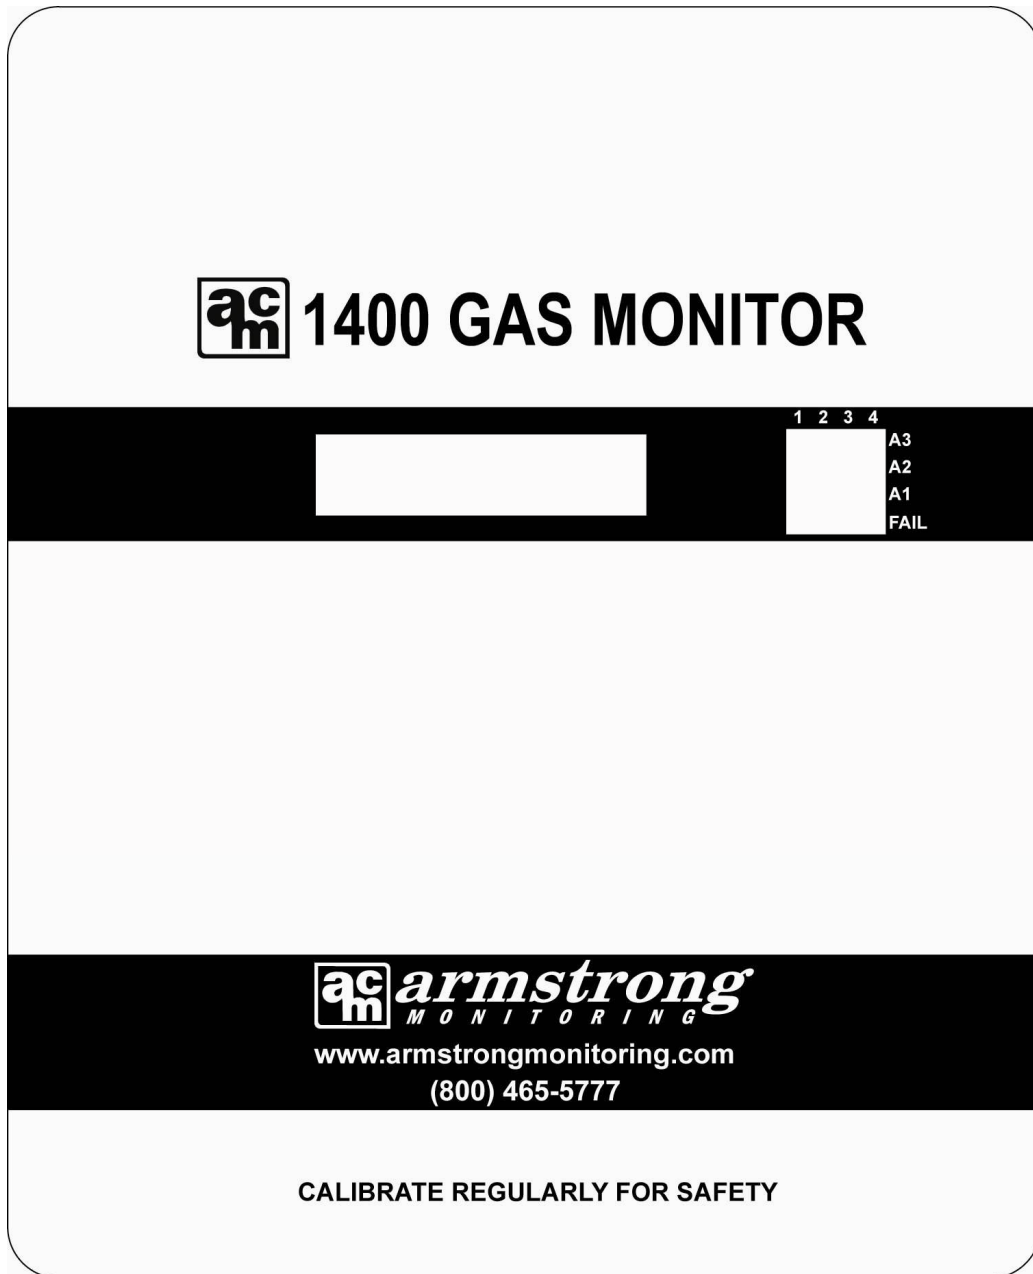


FIGURE 1: Front Panel Layout.

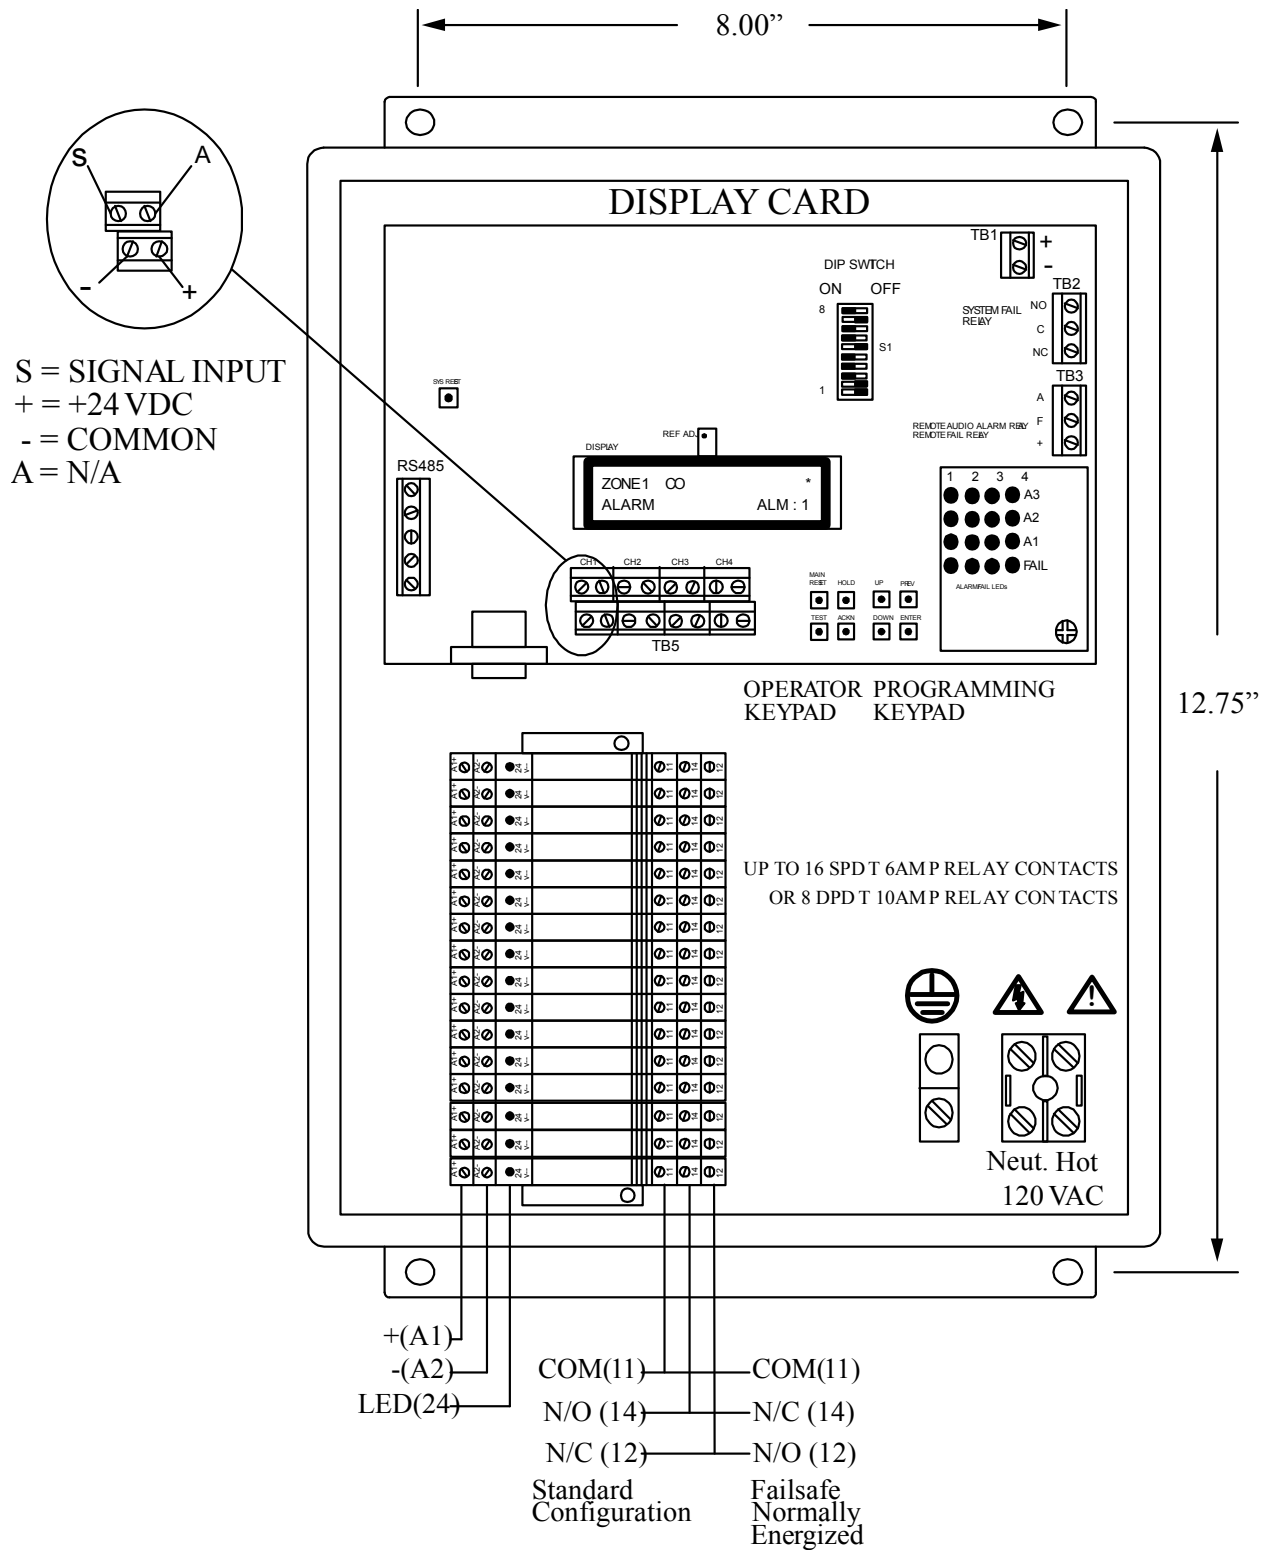


FIGURE 2: Internal Layout Of Components.

5 INSTALLATION

5.1 LOCATION AND MOUNTING

Care should be taken to securely fasten the AMC-1400 monitor unit on a solid, non-vibrating surface or structure at eye level. Mount the monitor in a NON-HAZARDOUS area where the unit can be observed periodically. (See Figure 2 for mounting hole locations.)

NOTE: All cable entry **MUST** be through the **BOTTOM** of the monitor enclosure only. Other entry locations will allow foreign materials to enter the enclosure, possibly causing damage to internal components. Mounting hardware and conduit connections are **NOT** supplied.

Warning:

Qualified personnel should perform the installation and maintenance according to applicable electrical codes, regulations and safety standards



5.2 CABLE SELECTION

The monitor's internal power supply provides 24VDC to power the Multidrop Sensor Modules. Connections from monitor to Multidrop Sensor Modules should be made using shielded 3 conductor cable. For best signal transmission and maximum noise rejection, run cable through steel conduit (cable shield must be grounded at the monitor). A maximum length of 150ft of 18 AWG size wire is allowed between the monitor and first units. For other distances or cable sizes, consult with the Armstrong Monitoring Corporation.

5.3 WIRING OF THE MONITOR

Power Supply: The monitor contains a 120 VAC, 60 Hz internal power supply to satisfy the internal circuitry low voltage requirements. The power supply connections are made at the two position terminal block located inside the monitor. (See Figure 2)

Relays: There are up to 16 SPDT or eight DPDT relays provided which operate as programmed with alarms. For relay contact arrangement of both relay types see Figure 3 and Figure 4. The relay contacts are available for activating a remote alarm and/or blower motors (where moving parts are fully guarded), pumps or lighting circuits. Relays are rated as per section 3.1.

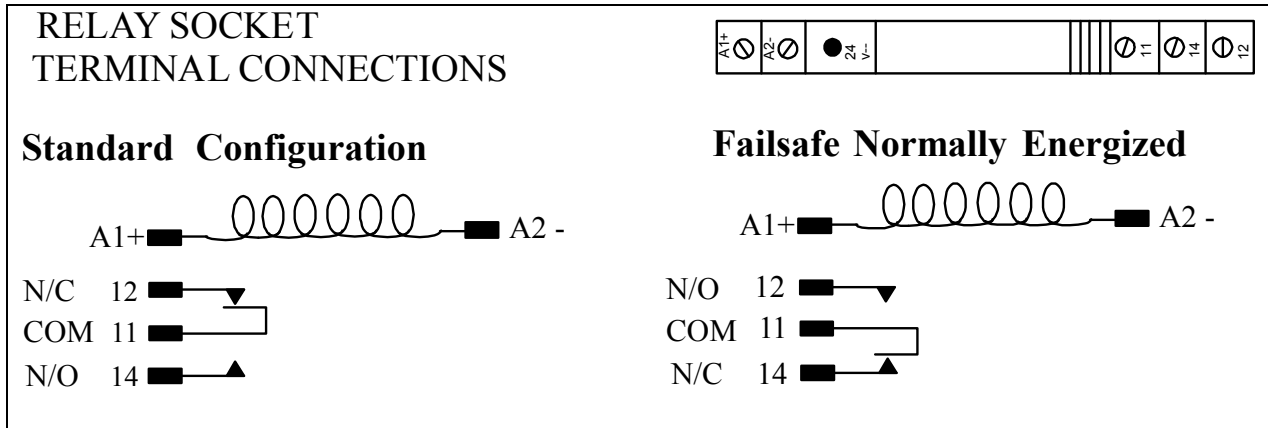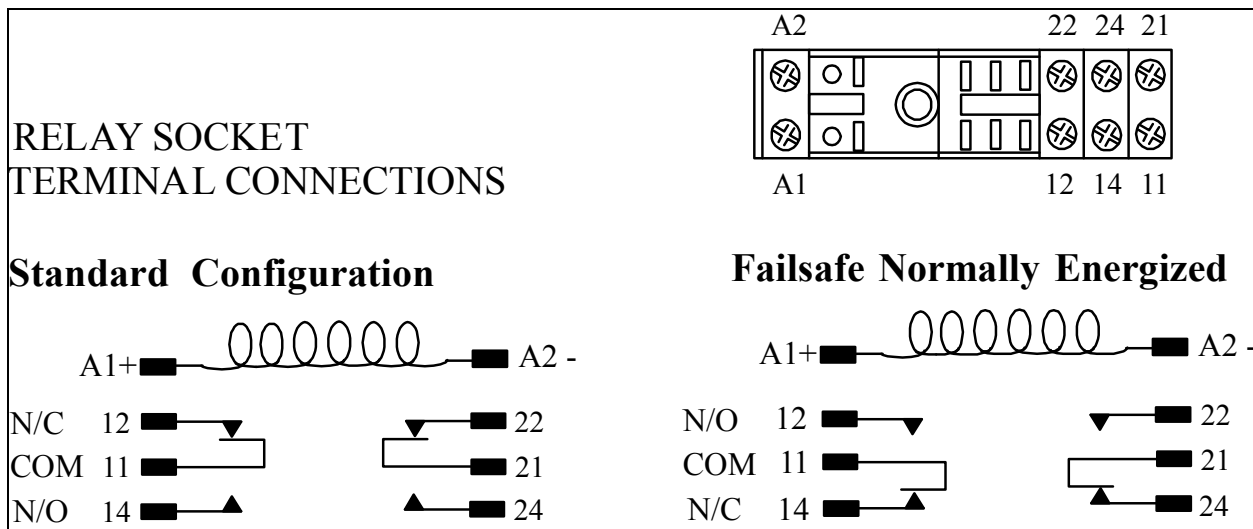
FIGURE 3: Relay Terminals For 6A SPDT Relay

FIGURE 4: Relay Terminals For 10A DPDT Relay

Inputs: Wiring details for Multidrop Sensor Modules are shown in Fig 5. See specific Multidrop Sensor Module manual.

Analog Output (A)

There are no analog outputs for Multidrop Sensor Modules.

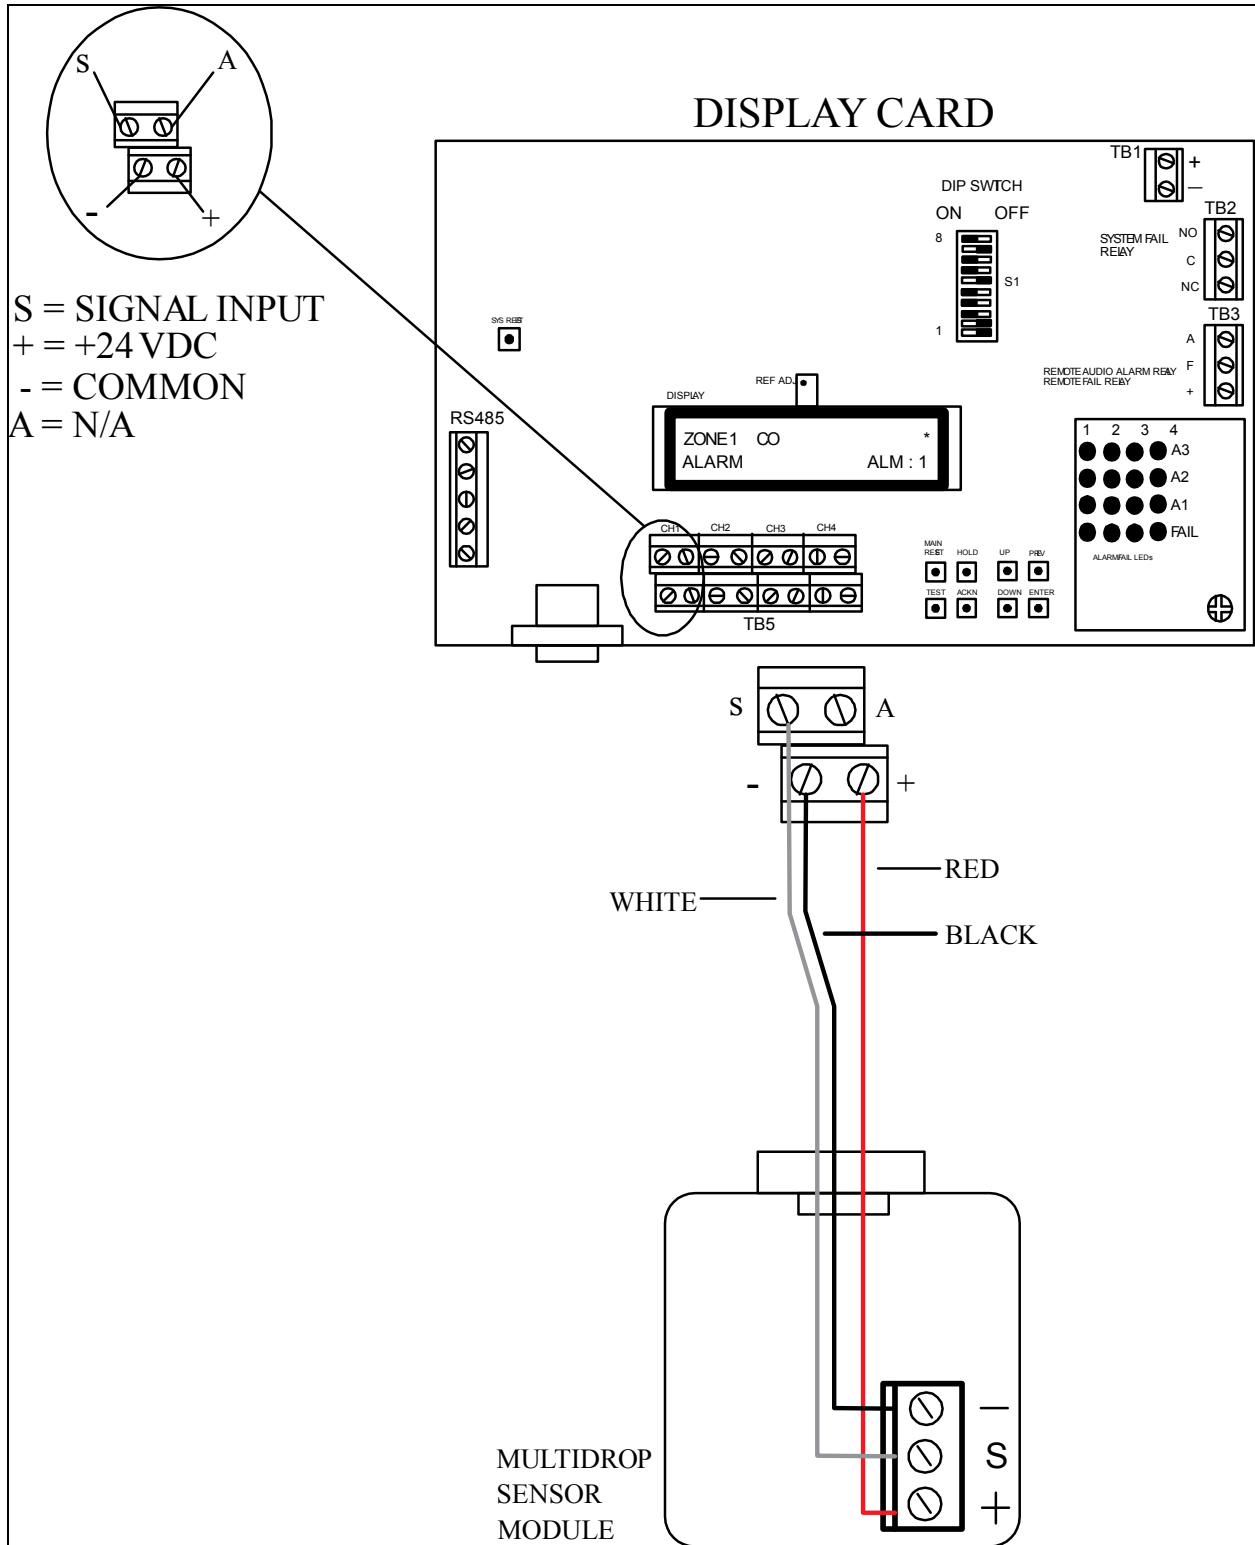


FIGURE 5: Multidrop Sensor Module Terminal Block Connections

6 OPERATION AND FEATURES

6.1 POWER-ON SELF TEST (POST)

The micro-controller provides read/write power-up testing of all RAM memory, checksum verification of the program code, and database integrity checking of the stored configuration data. Detected failures cause the common fail relay to remain de-energized, the audio alarm to remain active, and an error message on the operator display.

On power-up, after the initial POST has been completed, the display shall present a title page identifying the product, manufacturer and software revision. After approximately 3 seconds, assuming that no errors were encountered, the display shall immediately enter the programmed display mode. (See Figure 6)

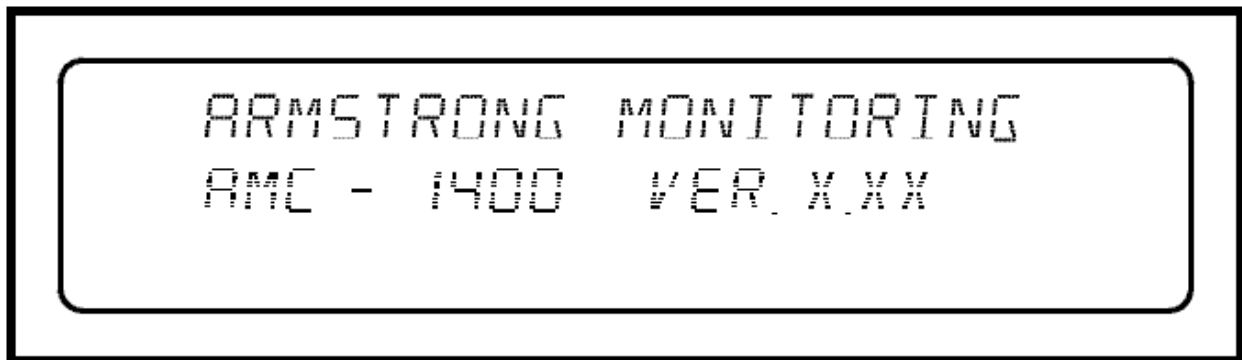


FIGURE 6: Power-On Display

The program then executes a continuous loop, in which each defined voltage input is sequentially scanned, alarm thresholds determined, pushbuttons scanned, outputs set as required, and the display updated.

6.2 DISPLAY

Display of alarm and failure conditions is provided using a VFD display. This display is mounted behind the front panel of the enclosure, and is visible through a transparent window. This arrangement provides physical protection for the display, while allowing the display to be viewed when the front panel is opened for setup or maintenance.

The display may be programmed to operate in one of these modes:

Display Alarm Mode

Simultaneous Display Mode

Display New Alarms Only Mode

Display All Data Mode

6.2.1 DISPLAY ALARM MODE:

Only the inputs in an alarm or failed state will be displayed. (See Fig7) Inputs are shown on display as Zone 1 to 4. Acknowledged alarms show as checkmark active alarms have asterisk.

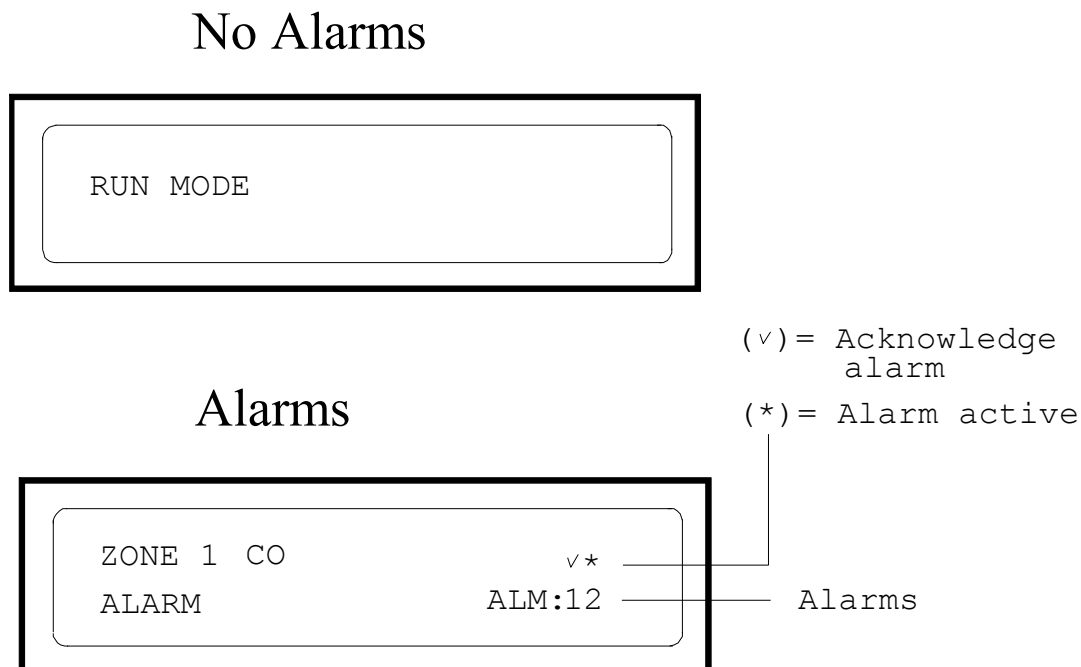


FIGURE 7: Display Alarm Mode

6.2.2 SIMULTANEOUS DISPLAY MODE:

All channels will be displayed with 2 flash cycles. If the hold button is pressed while in simultaneous mode the unit will switch to Display All Data mode and will continue to cycle through channels each time the hold button is pressed. (See Figure 8)

FLASH 1: GAS TYPE

| | |
|-----------|---------|
| 1 : CO/NO | 3 : NO2 |
| 2 : CO | 4 : NO2 |

FLASH 2: CONCENTRATION

| | |
|--------|--------|
| NORMAL | NORMAL |
| NORMAL | FAIL |

FIGURE 8: Simultaneous Display Mode

6.2.3 DISPLAY NEW ALARMS ONLY MODE:

Only unacknowledged alarms will be displayed. (See Figure 9)

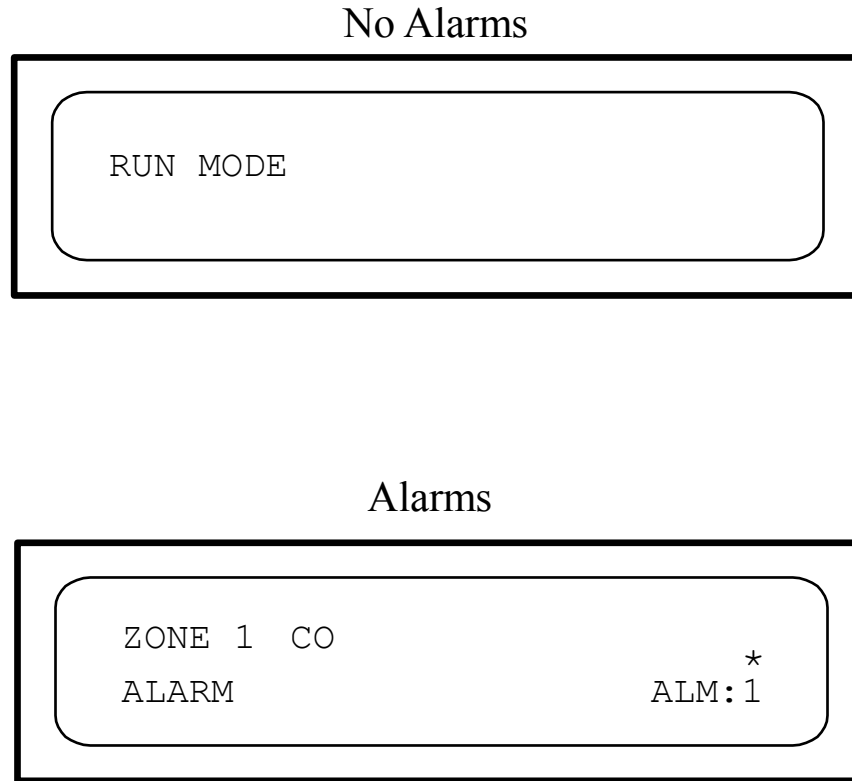


FIGURE 9: Display New Alarms Only

6.2.4 DISPLAY ALL DATA MODE:

The display will continuously cycle through all defined inputs, showing the zone number, gas label, current concentration (engineering units or bar graph display) and any alarm conditions active for each zone. (See Figure 10)

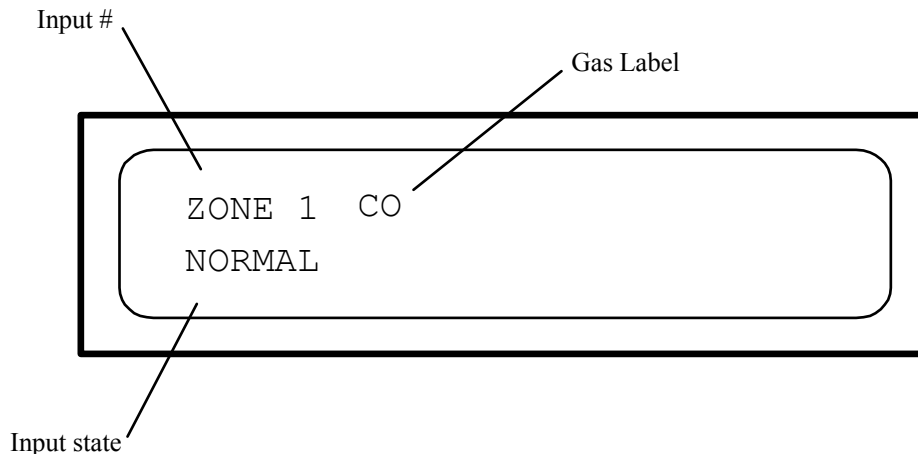


FIGURE 10: Display All Data



6.3 FEATURES

- Inputs:** Multidrop Sensor Modules are supported where 0V represents a fail condition, 1V represents No Alarm, 2 V represents a low alarm and 3V represents a high alarm. Inputs are identified on display and as Zone 1, 2, 3, and 4. Up to 8 Sensor Modules may be connected to each input.
- Gas Label:** A gas label may be selected for each input, chosen from a pre-programmed list of gas types or 9 user configurable labels. For ease of configuration, selection of a gas label automatically sets various associated input parameters to a default value. For Multidrop zones where both CO Multidrop Sensor Modules and NO2 Multidrop Sensor Modules are used a user configurable label is required.
- Displayed units:** Typically Engineering units are set to EXT-V for display of Voltage at the inputs which reflect the Multidrop Sensor Modules state. See Inputs.
- Zero buffering:** To reduce false readings based on external noise and zero level sensor drift, a zero buffering feature is provided. However with MultiDrop Sensor Modules this feature is not employed since set voltage values are output. Set value to disabled.
- Alarm detection:** For the Multidrop Sensor Modules that support CO and NO2 only alarms disabled and increasing concentration are suitable programming modes for Alarm detection.
- Up to two alarm thresholds may be configured for each input, Each alarm threshold is individually adjustable at the Sensor Module. An output of 2V is received at the input for low alarm conditions and 3V for high alarm conditions. Input thresholds are set at 1.76V and 2.76V which are just below these limits and default hysteresis values are always used.
- Maximum time to scan inputs, determine alarms and fail conditions, and annunciate such conditions using the relay outputs shall not exceed two (2) seconds.
- Failure detection:** Multidrop Sensor Modules should be set to 0V.

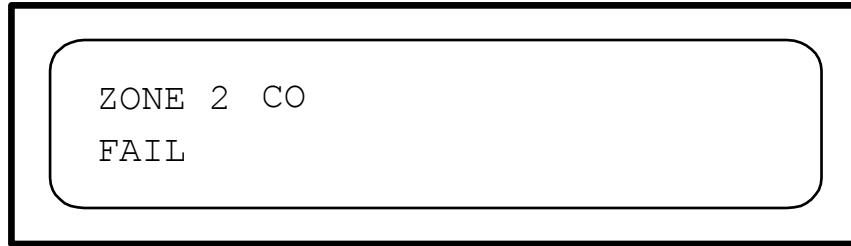


FIGURE 11: Failure Detection

The failure condition for each input may be assigned to any relay output, and may also be combined with alarm outputs. In addition, any input in a failed state will cause the common fail relay output to become de-energized. Failure detection is disabled for undefined inputs making the use of termination resistors at unused inputs unnecessary.

Alarm activation delay: An individually adjustable alarm activation delay is available for each alarm threshold for each input (excluding failure alarms), in increments of 1 minute, up to a maximum of 60 minutes. In addition, a common, adjustable power-up delay, programmable from 0 to 999 seconds, is provided on all alarm and failure indications.

Output relays: External indication of alarms is made available through the use of output relays. Each relay may be assigned to energize or de-energize on detection of one or more alarms and/or fail conditions. Additionally, a count value may be programmed, such that a minimum number of alarm conditions must be present before the relay is energized (voting logic).

Several types of relays may be provided, depending on the application. The standard relay type is a single-pole, Form C relay (SPDT), capable of switching up to 6A at 250VAC. Option available for 10A 250 VAC DPDT relay. Relay drivers (coil drive circuitry) are provided to drive a maximum of 16 relays. Relay numbering starts at 1, corresponding to the first relay within the group connected to the Display Card. An LED on each (SPDT) 6 AMP relay indicates when coil is energized.

Minimum run time: An individually adjustable minimum run (activation) time is available for each relay output, in increments of 1 minute, up to a maximum of 60 minutes.

Latching relay operation: Each relay may be programmed to reset automatically after the corresponding alarm condition has been cleared (and the minimum run timer has expired, if enabled), or to be maintained in the alarm state until manually reset.



- Audible alarm:** An internal audible alarm is provided. An output for activation of a remote audible alarm and/or relay is also provided. This alarm/relay may be programmed to energize on all detected alarms and failures, alarms only, or high alarms only (including outside of the preset window for windowed alarms). The audible alarm may also be disabled by means of a DIP-switch 1. Alarm activation is affected by any programmed alarm activation delays, but not by relay minimum run time.
- System fail relay:** A normally-energized fail relay output is provided, which will become de-energized on power failure, microcontroller failure, or failure of any defined input. This output is not subject to alarm activation delays or minimum run times. A power or controller failure will result in de-energizing of this fail relay output. An intermittent (power) failure resulting in a system reset will result in a momentary failure indication. This relay will be held in the non-failed state during the subsequent power-up delay. This relay will be held in the failed state while CAL Mode is selected
- LED status board:** Each input has three status LED's, one for each threshold and one for fail. The LED's are located on a mezzanine board that plugs into the Display Card. If an alarm is present the corresponding LED will start to flash until the alarm is acknowledged or until the alarm condition has cleared.

6.4 OPERATOR INTERFACE

Keypads: The mother board contains a pair of four button keypads. (Refer to Figure 12)
 The Operator Keypad provides function keys main reset, hold, test and acknowledge.
 The Programming Keypad provides a security protected interface for reviewing and modifying program parameters.

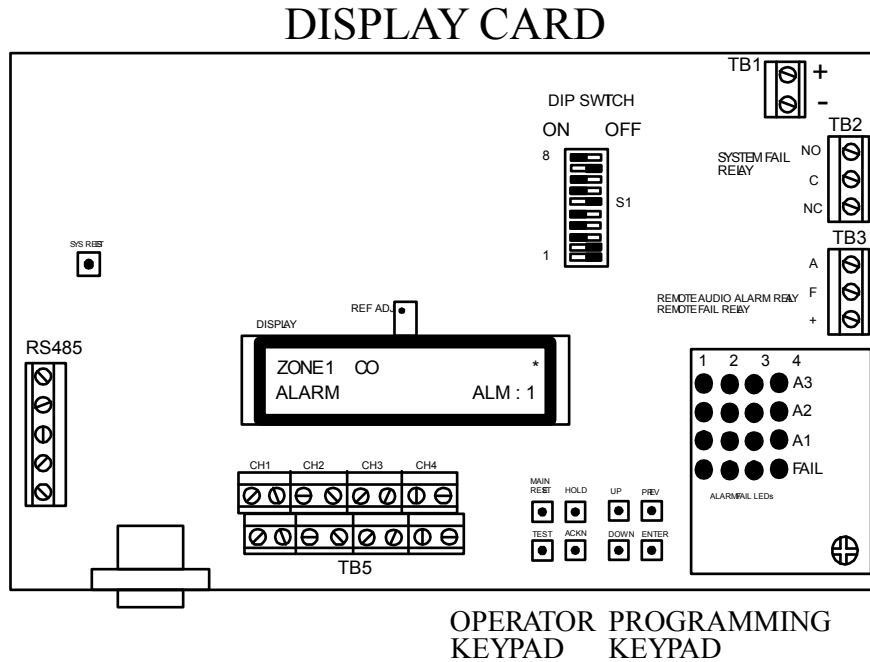


FIGURE 12: Operator Interface

6.4.1 OPERATOR KEYPAD

ACKNOWLEDGE Pushbutton: When pressed, this pushbutton shall silence the audible alarm indication resulting from all active alarms for an individual, adjustable, preset length of time within the range of 0 to 60 minutes or infinite. Setting the value to “0” shall disable the acknowledge feature.

It is possible to configure this pushbutton to also reset all associated relay output indications, subject to defined minimum run times for each relay.

In this way, an additional or recurring zone alarm condition shall again cause an alarm/fail indication.

Pressing the acknowledge pushbutton in response to new or recurring alarm conditions shall reset the acknowledge timer



to the preset time, including conditions previously acknowledged.

Failure indications cannot be acknowledged, except to reset the system fail relay.

TEST Pushbutton:

A test pushbutton is provided, which, while pressed, shall cause continuous activation of all relay outputs (energized or de-energized, depending on configuration), activation of the system fail relay output (to the de-energized state), and continuous activation of the audio alarm (if enabled). Input processing and updating of internal status and timers shall continue. When released, all outputs shall return to normal operation.

HOLD Pushbutton:

A hold pushbutton is provided, which, while pressed during normal operation, shall freeze the display on the currently displayed input until released. Upon release, the display shall immediately advance to the next input (depending on the display mode selected), allowing the HOLD pushbutton to be used to quickly step through multiple inputs.

RESET Pushbutton:

When pressed, this resets any latching relays, providing the alarm condition has subsided.

6.4.2 PROGRAMMING KEYPAD

System setup, configuration and maintenance are performed using the VFD display and the programming keypad. Four pushbuttons are provided, labeled **PREV**, **UP**, **DOWN** and **ENTER**. These pushbuttons easily allow all setup menus to be traversed, parameters selected and value entered, as follows:

PREVIOUS Pushbutton: Moves to the next highest menu level, or exits setup mode from the top level of the setup menu.

UP, DOWN Pushbutton: Scrolls through the current menus, selects parameters, increments or decrements selected parameter option or value.

ENTER Pushbutton: Selects a sub-menu or confirms a menu (parameter) choice.

All systems parameters except selection of default Display Mode, require a password-protected log-in before they can be modified. Entry into "System Setup" mode shall be implemented by pressing the ENTER pushbutton while in any "Display" mode.

Immediately upon entry into "System Setup" mode, the user shall be required to enter a 4-digit alphanumeric password before and system parameters modified (except for the selected display mode). The password characters shall be selected using the UP, DOWN and ENTER keys, and each digit of the password shall be blanked while the following digits are being entered. The default password is 1234.



Until a correct password is used to log into the system, setup data may be viewed but not changed. The user password shall be changeable only after the user has logged-in using either valid password.

6.4.3 DIP SWITCH ASSIGNMENTS

The Display Card DIP switches are used to select various system setup and test features. The DIPswitch assignments are tabled below. See Figure 13.

| Switch | Function | Normal Position | Description |
|--------|-------------------|-----------------|---|
| 1 | Audio Disable | ON | OFF to disable audio alarm |
| 2 | Delay Disable | ON | OFF to disable all relay activation delays |
| 3 | Zero Buff Disable | ON | OFF to disable zero buffering |
| 4 | Min Run Disable | ON | OFF to disable all relay minimum run times |
| 5 | CAL Mode | OFF | ON to activate CAL mode |
| 6 | | | Not used |
| 7, 8 | Language Select | See Description | 7 OFF, 8 OFF = ENGLISH 7 ON, 8 OFF = FRENCH 7 OFF, 8 ON = SPANISH (future) 7 ON, 8 OFF = GERMAN (future) |

FIGURE 13: DIP Switch Assignments

6.5 AMC-1400 MENU

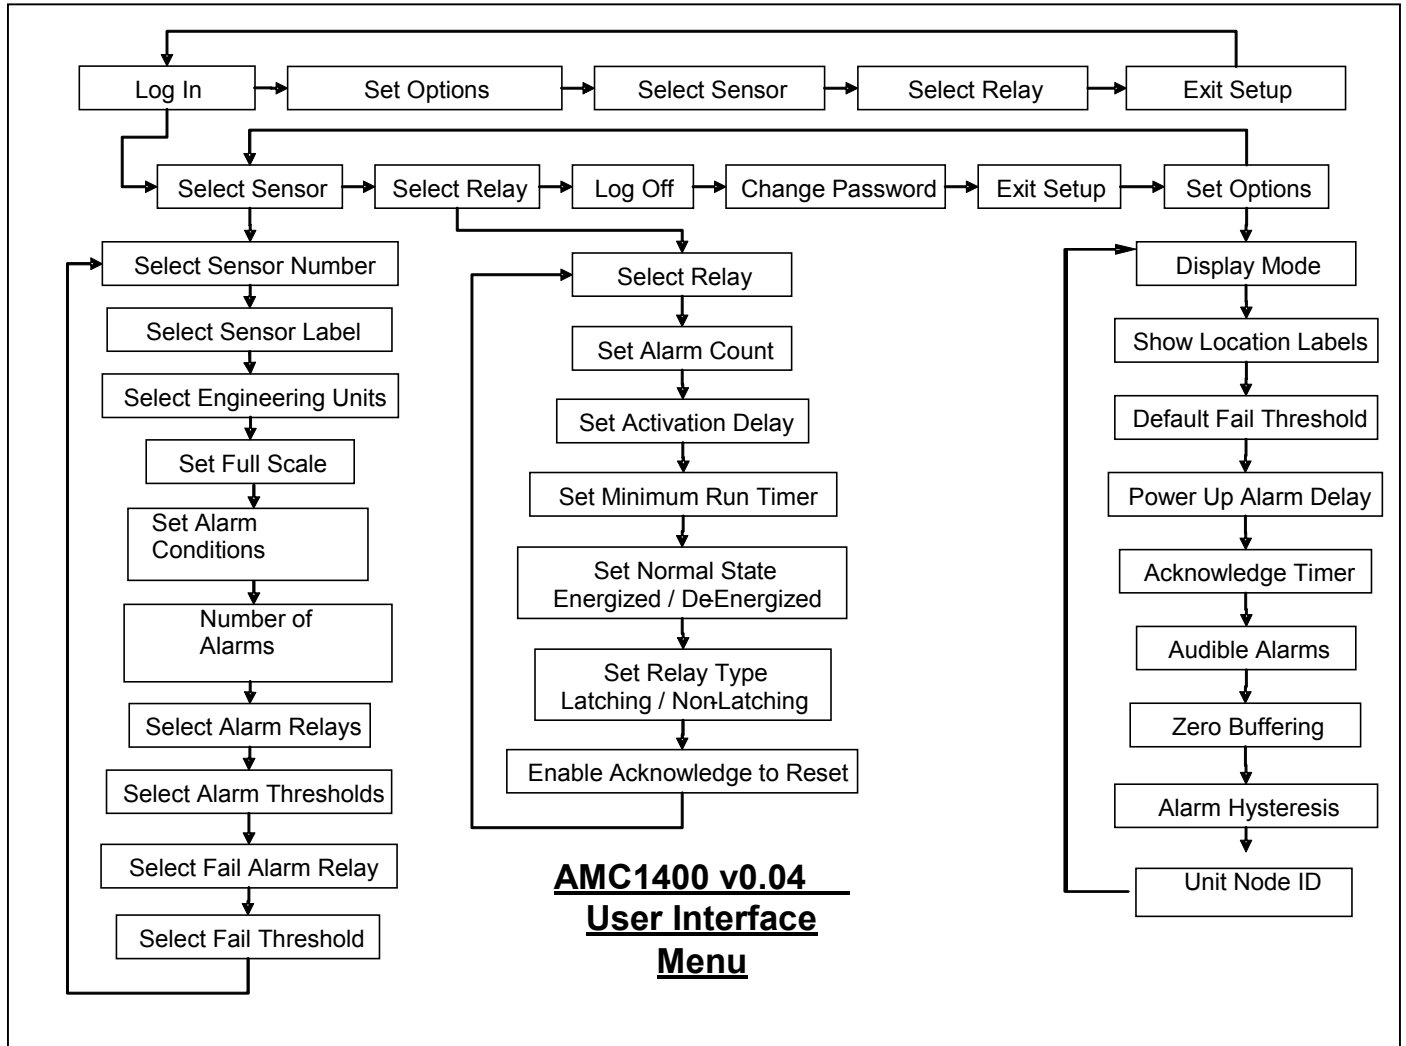


FIGURE 14: AMC-1400 Menu



7 PREVENTIVE MAINTENANCE

7.1 GENERAL

The monitor unit should be brushed or wiped clean once a year or more, of any dust or dirt which settles on it, depending on the accumulation.

The unit SHOULD NOT be submerged in water or other liquids. Also hosing and other conditions that could cause a liquid to enter the enclosure should be avoided.

7.2 VERIFICATION OF MONITOR

Verification of operation should be done at least once every 6 months. For highly demanding applications more frequent verification is recommended.

7.3 SENSOR MODULE MAINTENANCE

CAUTION: For a Sensor Module, follow the recommended procedures described in the appropriate Sensor Module manual.

7.4 CALIBRATION

Calibration is recommended two times per year.