

AMC-1A Series Single/Dual Channel Gas Monitor

The AMC-1A Series Gas Monitor provides a highly configurable monitoring package for a multitude of applications. Incorporating micro-controller based design, it provides accuracy, durability, and ease of use within a compact package. The versatile AMC-1A Series Monitor can be configured to work with all AMC sensors and sensor/transmitters

The monitor delivers low cost and versatility, turning even the simplest job into big savings. It incorporates a robust enclosure designed to provide optimal gas flow ensuring optimum response.

SPECIFICATIONS

Enclosure: ASA 61 gray enameled 16 gauge steel
Nema 4X Fiberglass (Optional)

Supply Voltage: 120 VAC, 60 Hz

Dimensions: 20.32cm H x 20.32cm W x 12.70cm D
(8" x 8" x 5")

Weight: 4.54 kg (10 lb)

Operating Temperature: -20°C to 40°C (-4°F to 104°F)

Storage Temperature: -40°C to 65°C (-40°F to 149°F)

Monitor Warranty: Two years

Relay Contacts: Up to 5 DPDT 10A @ 250 VAC Res.

Alarm Thresholds: 2 Per Channel, Available Fail

Indicators (per Gas):

Red LED – **Alarm**

Yellow LED – **Warning**

Green LED

- LED On – **Run**
- LED Flashing – **Fault**
- LED Off – **Off**

Recommended Mounting Height: 4-5 ft. A.F.F.

Concentration Display(s) – Optional



Features

Alarms disabled during warm up

System test switch

User selectable:

- Activation delays, five minutes for Warning and/or Alarm set points
- Minimum Run Timer
- 95 dBa Audio alarm with Warning and/or Alarm set points

Hinged door


Optional latching relays with manual reset

Optional enclosure key lock

BUILT WITH 100% GREEN ELECTRICITY



AMC-1A Series Internal View

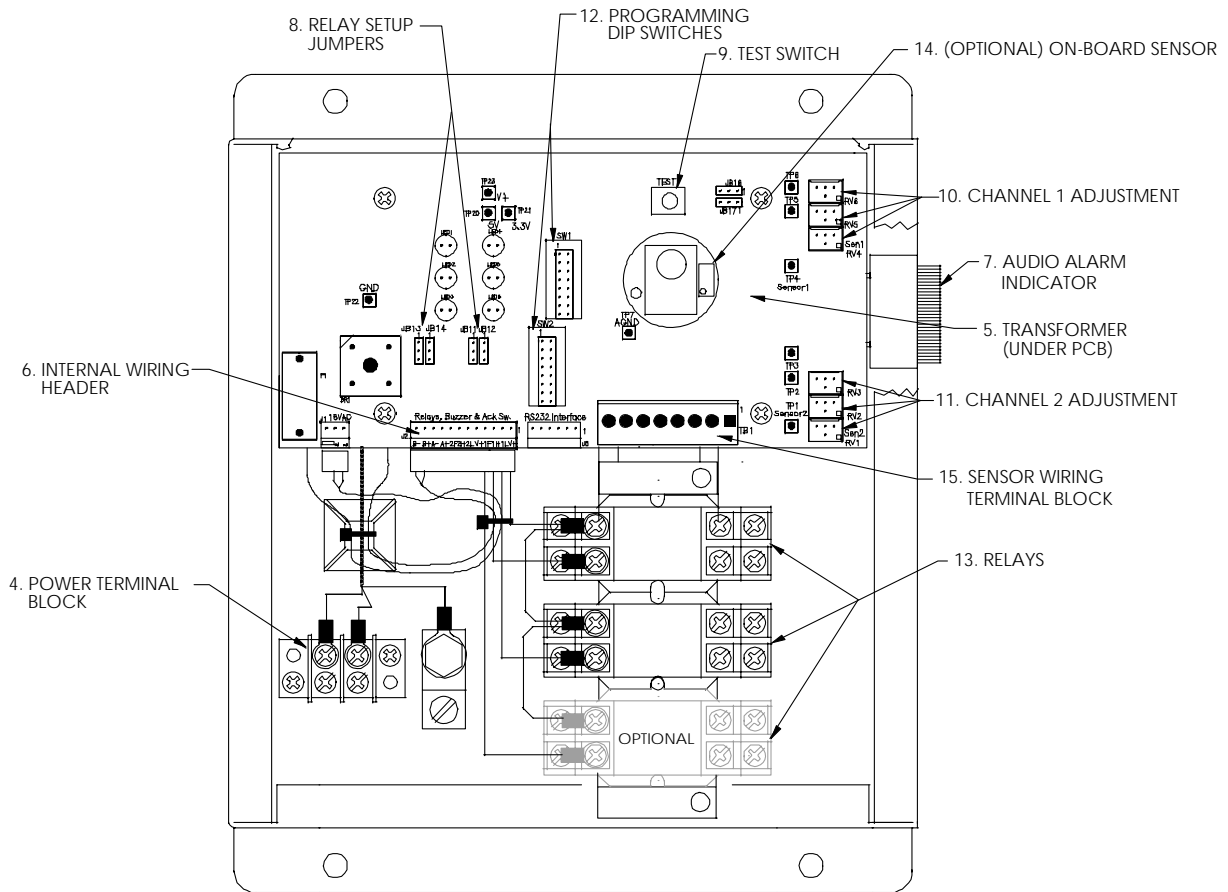

AMC-1A Series Build Code

